

# Isolation of microalgae with potential for integrated biomass production and nutrient removal from wastewater

Jen-Jeng Chen\*, Yu-Cheng Huang, Yu-Ru Lee

\*Graduate Institute of Environmental Management, Tajen University, Pingtung, Taiwan

e-mail: jerry@tajen.edu.tw

**Abstract** The present study firstly investigates the variations of microalgae in the constructed wetland. Then one of the potential microalgal species was isolated and cultured in autotrophic and mixotrophic growth to compare the performance on biomass production and to evaluate the ability of wastewater treatment and simultaneous biodiesel production. *Scenedesmus* sp. was an abundant strain in the constructed wetland during one year of monitoring. Under both autotrophic and mixotrophic cultivation conditions, an appropriate composition of each source was beneficial for respective biomass production, 8% (v/v) CO<sub>2</sub>, and 40% piggery wastewater content. The specific growth rate and lipid productivity obtained with autotrophic growth were slightly higher than those obtained by mixotrophic growth. Both cultivation conditions led to dissimilar fatty acid compositions. Comparing the autotrophic and mixotrophic growth, the mixotrophic cultivation not only produced biomass, but also could assimilate up to 81.5% total nitrogen, 64.6% total phosphorus, and 60.7% chemical oxygen demand (COD) from piggery wastewater, respectively. The high biomass productivity was observed at 16.9:1.1:1 of COD/TN/TP of piggery wastewater.

**Keywords:** Biodiesel, *Scenedesmus* sp., piggery wastewater

## 1. Introduction

Microalgae are considered a potential source of biodiesel, due to its higher biomass production and faster growth rate than other energy crops. However, the production cost of biodiesel from microalgae is usually higher than that from traditional crops. Because the high cost of chemical usage during algae cultivation and the high costs for the harvesting and drying process (Sander and Murthy, 2010). The integration of algal biomass production and wastewater treatment is considered to be one of the most viable strategies for the cost reduction in algae-based biodiesel industry.

Biodiesel production from algae is significantly affected by factors such as cultivation conditions, culture system, algae species, biomass harvesting, and oil extraction. There are four major types of cultivation conditions, namely photoautotrophic, heterotrophic, mixotrophic, and photoheterotrophic cultivation. The cultivation condition significantly influences the growth characteristics and composition of microalgae. For example, the mixotrophic

*Nannochloropsis* sp. grown in the presence of 2 g/L glycerol resulted in higher fatty acid methyl esters (FAMES) productivity, an increase of over 72% compared to photoautotrophic culture (Das *et al.*, 2011). Bohutskyi *et al.* (2016) showed that *Scenedesmus acutus f. alternans* had higher growth rates, productivities, while supplementing with 5-10% nutrient-rich anaerobic digestion centrate enhanced microalgal growth rates from 0.2-0.3 d<sup>-1</sup> to 0.7-0.9 d<sup>-1</sup> and biomass productivity from 10 to 20 mg/L.d to 40-60 mg/L.d with greater improvements for secondary effluents. Sydney *et al.* (2011) found that *Botryococcus braunii* was able to remove N and P nutrients (79.63%) from treated domestic wastewater, and accumulate oil with a dry biomass of up to 36%.

The lipid accumulation of microalgae in wastewater depends on growth conditions, especially the nutrients content (Chisti 2007; Pittman *et al.* 2011). Li *et al.* (2010) reported that *Scenedesmus* sp. in an artificial medium at a 5-8:1 N/P ratio can efficiently remove both nutrients. This microalgae also led to the accumulation of lipids (30% vs. 53%) when N or P was limited. However, a high lipid content being induced, the cell growth rate is often very low, thereby limiting lipid productivity (Scragg *et al.* 2002). Hence, high lipid productivity associated with biodiesel production needs both lipid content and suitable nutrient ratio for microalgal growth in wastewater.

It has been suggested that indigenous mixotrophic strains have intrinsic characteristics lacking in type culture collections and genetically engineered organisms (Wilkie *et al.* 2011). The specific objectives of this study was to investigate firstly the variations of microalgae in the constructed wetland, which mainly receives domestic and piggery wastewater. Then one of the potential microalgal species was isolated and cultured in autotrophic and mixotrophic growth to compare the performance on biomass production and to evaluate the ability of wastewater treatment and simultaneous biodiesel production.

## 2. Materials and Methods

### a. Collection and isolation of microalgal samples

Water samples (10 L each) were taken at three depths (0.2 m, 0.5 m, 0.8 m below the surface) of the water column at Linluo constructed wetland in southern Taiwan

(20°39'02''N; 120°31'38''E). A 1000-mL of each sample, totally 3 L composite water sample was collected. After thoroughly mixing, a final 1 L water sample was then collected and preserved by adding 3 mL of Lugol's iodine solution. The water sample was stored in a transparent plastic bottle in a dark environment and sent to the laboratory within 24 hours for algal cell identification and isolation. The strains were identified for taxonomy using Standard Methods (APHA, 1995) and morphology.

#### b. Microalgal culture

One of the dominant green algal species, *Scenedesmus* sp., was isolated from the sample water and cultured in a medium according to a method given by Norris *et al.* (1955). The microalgae that reached enough seed culture was inoculated in batch mode in a 1 L modified serum bottle containing 600 mL of pretreated piggery wastewater and Norris medium, respectively. The bottles were placed in the incubator, which continuously provided 5 kLux of illumination, 25 °C of temperature, and 0.8 L/min of air aeration. The piggery wastewater was collected from the effluent of a wastewater treatment plant of a local pig farm in southern Taiwan. The piggery wastewater effluent was filtered through a 0.45 µm membrane and sterilized before experiments. Before the start of the experiments, the strain was cultivated in piggery wastewater and Norris medium for three generations to obtain stable characteristics, respectively. The cultures were harvested in the log growth phase after 8 days for experiments.

#### c. Biomass concentration and lipid content

The dry weight of the microalgal biomass was determined gravimetrically. A known volume of microalgal culture was collected and dried at 90 °C for 3 hours. The growth rate ( $\mu$ ) was calculated according to the equation  $\mu = (\ln A_1 - \ln A_0)/(T_1 - T_0)$ , where  $A_1$  and  $A_0$  are the dry weights of the microalgal biomass at times  $T_1$  and  $T_0$ , respectively. The biomass concentration (mg/L) is expressed as the dry weight of the microalgal biomass.  $A_0$  are the dry weights of the microalgal biomass at times  $T_1$  and  $T_0$ , respectively. The dry weight of cells was

A stock culture of *Scenedesmus* sp. cells was collected by centrifugation at 2,000 rpm for 10 min (CR22G III, Hitachi, Japan). The precipitated algal cells were washed and resuspended in deionized water in triplicate.

Cells were collected by centrifugation and then dried in a freeze dryer at -80 °C at about 30 Pa. The microalgal total lipids were extracted with n-hexane/methanol (2/1, v/v) in a Soxhlet extractor and quantified gravimetrically. The lipid content (g/g) is expressed as the dry weight of the microalgal biomass. The biomass productivity was calculated from cultivation time (d) and biomass concentration (mg/L).

#### d. Nutrients analysis

The samples were first filtered through a 0.45-µm membrane and then the filtrate was properly diluted and analyzed for chemical oxygen demand (COD), TN, and total phosphorus (TP). COD, TN, and TP concentrations were determined according to the Methods for

Examination of Water and Wastewater (APHA, 1995). The characteristics of piggery wastewater used in this experiment were COD in the range of 98.2-492 mg/L, TN of 8.8-44.1 mg/L, and TP of 0.9-4.7 mg/L.

#### e. Extraction method and analysis of FAMES

Freeze-dried biomass ( $0.1 \pm 0.002$  g) was placed in 50-mL Teflon-capped Pyrex tubes and mixed with a premixed homogeneous solution of NaOH catalyst (2.5 wt.%) and methanol. 8.0 mL of alkali catalyst was added to the tubes. The transesterification reaction and FAME analysis (Agilent 7820A, USA, flame ionization detector, and a DB-23 Agilent column) was followed given by Chen and Lee (2016). The temperature program FAMES were identified by comparing their retention times with those of a 37-component FAME mix (Supelco, USA) and quantified by comparison with the prepared calibration curves.

### 3. Results and Discussion

#### a. Phytoplankton community composition of the Wetland

The whole Linluo constructed wetland mainly receives domestic and piggery wastewater, covering overall surface water area of 3.49 ha with a hydraulic retention time of 4.3 days and average water depth of less than 1.5 m. Fig. 1 shows a total of 4 phyla (22 total species), namely Bacillariophyta (8 species), Chlorophyta (8 species), Euglenophyta (2 species), and Cyanophyta (4 species) in the local wetland sample. Bacillariophyta and Chlorophyta made up the most significant proportion of the community composition. Chlorophyta accounted for the most species. One species of the Chlorophyta, *Scenedesmus* sp., was the second most abundant strain ( $4.43 \times 10^4$  cells/mL) for one year monitoring.

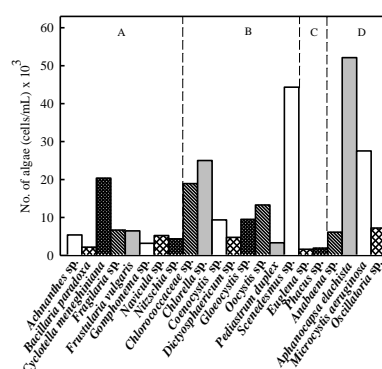


Fig. 1 Concentrations of various algal species in Linluo constructed wetland (A: Bacillariophyta; B: Chlorophyta; C: Euglenophyta; D: Cyanophyta).

#### b. Optimization of photoautotrophic and mixotrophic growth

Photoautotrophic cultivation occurs when the microalgae use light as the energy source, and inorganic carbon (e.g., CO<sub>2</sub>) as the carbon source to form chemical energy through photosynthesis. While mixotrophic cultivation undergoes photosynthesis and use both organic compounds

and inorganic carbon (CO<sub>2</sub>) as a carbon source for growth. The cell growth, specific growth rate, and biomass productivity for various CO<sub>2</sub> is shown in Fig. 2. It can be seen that *Scenedesmus* sp. survived in all of the cultures and no obvious lag phases were observed. The average specific growth rates under cultures with CO<sub>2</sub> content levels of 2, 4, 8, 12, and 16% were 0.09, 0.14, 0.152, 0.137, and 0.136 d<sup>-1</sup>, respectively. 8% CO<sub>2</sub> content resulted in the highest cell growth, higher CO<sub>2</sub> concentration did not further improve cell growth. Similar results were reported for *Scenedesmus obliquus* by Kaewkannetra *et al.* (2012). This is probably due to excess CO<sub>2</sub> being converted to H<sub>2</sub>CO<sub>3</sub>, resulting in a reduction of pH in the culture, thereby affecting cell growth.

Under piggery wastewater cultivation, the better cell growth of *Scenedesmus* sp. was cultured at ranged from 40% to 80% piggery wastewater content (Fig. 3). High biomass productivity (48 mg/L.d) was found at 40% piggery wastewater content. This 40% piggery wastewater content culture reached 48 mg/L.d lipid productivity, compared to that obtained with the culture under 8% CO<sub>2</sub> content (46 mg/L.d).

c. Effect on lipid productivity and biodiesel composition

Fig. 4 shows the effects of CO<sub>2</sub> and piggery wastewater cultivation on lipid content and lipid productivity. Although 4% CO<sub>2</sub> resulted in the highest lipid content

(23.5%), the highest lipid productivity (9.6 mg/L.d) was achieved with 8% CO<sub>2</sub> content. The results show that high CO<sub>2</sub> content not only decreased cell growth, but also significantly hindered lipid accumulation. Lipid productivity is the mass of lipids produced per unit volume of the culture per unit time; it depends on the algal growth rate and the lipid content of the biomass. Under piggery wastewater cultivation, the better performance of lipid productivity (8.3 mg/L.d) was obtained with 40% piggery wastewater content, similar to that of biomass productivity.

Table 1 compares the FAME composition of *Scenedesmus* sp. grown in CO<sub>2</sub> and piggery wastewater. The microalgae produced fatty acids, comprising mainly lauric acid (C12:0), tridecanoic acid (C13:0), palmitic acid (C16:0), oleic acid (C18:1), linoleic acid (C18:2), and linolenic acid (C18:3). C16:0 and C18:3 were abundant in *Scenedesmus* sp. cells under CO<sub>2</sub> cultivation, while that of C12:0 and C16:0 for piggery wastewater cultivation. The combined percentages of each these two fatty acids were 63.6% and 61.4% of the total fatty acids for 8% CO<sub>2</sub>, and 40% piggery wastewater content, respectively.

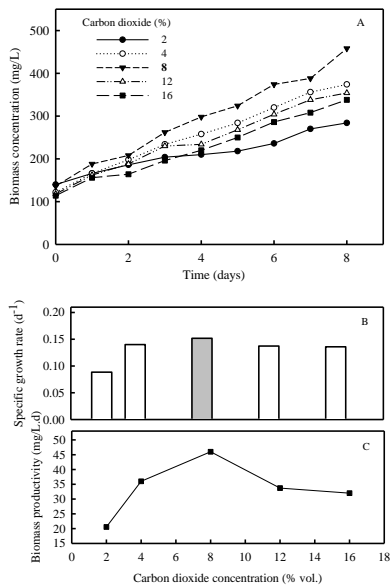


Fig. 2. Cell growth (A), specific growth rate (B), and biomass productivity (C) in various CO<sub>2</sub> content.


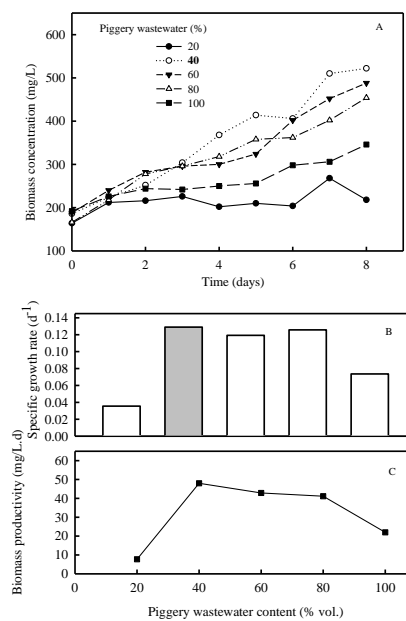


Fig. 3. Cell growth (A), specific growth rate (B), and biomass productivity (C) in various piggery wastewater content.

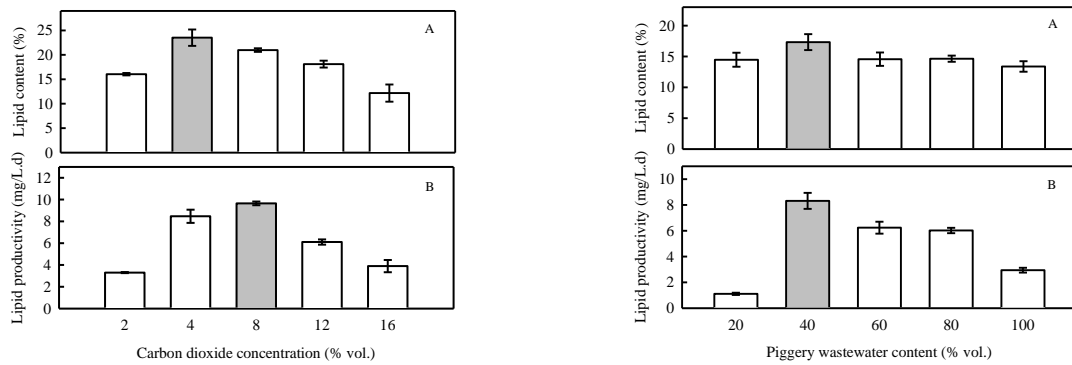

**Fig.4.** Lipid content and lipid productivity in various content of CO<sub>2</sub> (A, B) and piggery wastewater cultivation (C,D).

**Table 1.** The FAME composition of *Scenedesmus* sp. grown in CO<sub>2</sub> and piggery wastewater.

CO <sub>2</sub> conc. (% vol.)	C13:0	C16:0	C16:1	C18:2	C18:3
2	11.04±0.25	28.24±0.84	10.32±0.41	14.64±0.20	35.75±0.48
4	9.11±0.22	30.12±2.49	10.05±0.04	15.11±0.75	35.61±2.00
8	9.10±0.43	33.70±0.00	10.00±0.11	17.28±0.13	29.92±0.40
12	10.76±1.19	28.91±1.67	11.05±1.24	18.35±0.55	30.92±1.07
16	13.00±0.12	32.41±0.37	9.75±0.17	15.68±0.04	29.16±0.38

Piggery wastewater content (% vol.)	C12:0	C13:0	C16:0	C16:1	C18:2	C18:3
20	19.27±0.02	11.71±0.08	24.96±0.17	9.52±0.09	7.22±0.26	27.31±0.11
40	45.06±0.52	11.49±0.15	16.34±0.08	9.08±0.08	9.13±0.23	8.90±0.30
60	45.67±0.28	11.11±0.95	16.08±0.23	8.74±0.03	8.62±0.48	9.79±0.49
80	43.85±1.00	10.49±0.60	17.38±0.03	9.36±0.14	7.56±0.19	11.36±0.10
100	18.11±5.90	12.96±0.20	24.66±2.25	12.36±1.00	11.59±1.02	20.32±1.82


*d. Integration biomass productivity and nutrient removal*

Fig. 5 shows the changes in TN, TP, COD, and cell lipid content with time under 40% piggery wastewater cultivation. TN decreased from 44.3 mg/L to 8.2 mg/L and TP dropped from 20.9 mg/L to 7.4 mg/L after 8 days of cultivation (Fig. 5A, 5B). The COD drastically decreased from 319.4 mg/L to 125.4 mg/L in the same period (Fig. 5C). The removal efficiencies of TN, TP, and COD are 81.5%, 64.6%, and 60.7%, respectively. The decrease in nutrients resulted in an increase in cell lipid content (Fig. 5D). Specific nutrient removal rates of 4.51 mg N/L·d, 1.69 mg P/L·d, 24.25 mg COD/L·d were obtained. These results are consistent with the nitrogen and phosphorous


removal rates reported by Ruiz *et al.* (2013) for a culture of freshwater *Scenedesmus obliquus* with removal rates of 13.5-4.2 mg N/L·d and 1.49-0.32 mg P/L·d in a synthetic medium.

The effect of COD/TP and TN/TP on biomass productivity of *Scenedesmus* sp. is shown in Fig. 6. The better performance of biomass productivity was found when supplied with a high COD/TP and low TN/TP in piggery wastewater content. The high biomass productivity was observed at 16.9:1.1:1 of COD/TN/TP of piggery wastewater, while that of low biomass productivity occurred at 15:2.1:1.

wastewater.

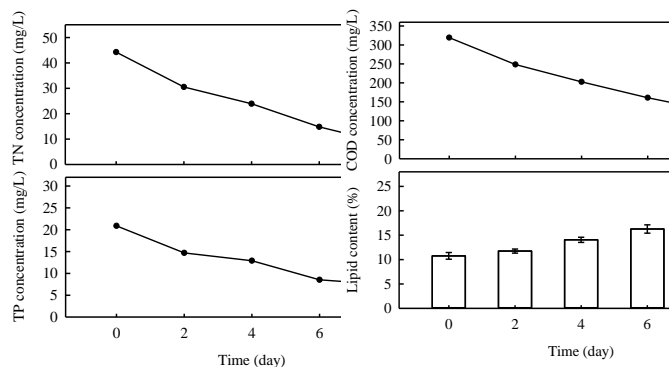

**Fig.5.** Total Nitrogen concentration (A), total phosphorus concentration (B), COD concentration (C), and cell lipid content (D) during batch culture on 40% piggery

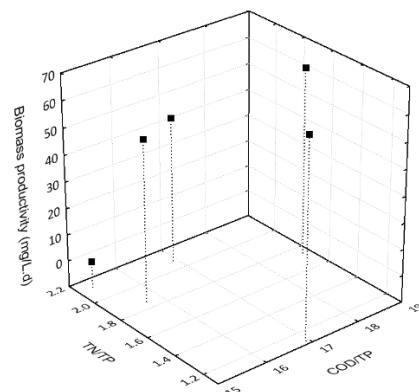

**Fig. 6.** The effect of ratio of TN, TP, and COD on biomass productivity of *Scenedesmus* sp.

#### 4. Conclusion

The study investigated the variations of microalgae in the constructed wetland during one year monitoring to bioprotect the potential microalgal species on biomass production and simultaneous biodiesel production. It was concluded that (1) *Scenedesmus* sp. was the abundant strain in the constructed wetland; (2) the optimal CO<sub>2</sub> and piggery wastewater content for cell growth were 8% and 40%, respectively; and (3) *Scenedesmus* sp. is a potential strain for integrating piggery wastewater treatment with algae biomass production, produced biodiesel practically and economically under mixotrophic growth.

#### Acknowledgment

The authors would like to thank the National Science Council of Taiwan for financially supporting this research under grants NSC 100-2632-E-127-001-MY3.

#### Reference

- APHA, AWWA, WEF 1995 Standard Methods for the Examination of Water and Wastewater: Part 10900 Identification of aquatic organisms, algae color plates, 19<sup>th</sup> ed, Washington, DC: American Public Health Association, American Water Works Association and Water Environment Federation.
- Bohutskyi P., Kligerman D.C., Byers N., Nasr L.K., Cua C., Chow S., Su C., Tang Y., Betenbaugh M.J., Edward J. Bouwer E.J. (2016), Effects of inoculum size, light intensity, and dose of anaerobic digestion centrate on growth and productivity of *Chlorella* and *Scenedesmus* microalgae and their poly-culture in primary and secondary wastewater, *Algal Research*, **19**, 278-290.
- Chisti, Y. (2007), Biodiesel from microalgae, *Biotechnol. Adv.* **25**, 294-306.
- Das, P., Aziz, S.S., Obbard, J.P. (2011), Two phase microalgae growth in the open system for enhanced lipid productivity, *Renewable Energy*, **36** (9), 2524-2528.
- Kaewkannetra P., Enmak P., and Chiu T.Y. (2012), The Effect of CO<sub>2</sub> and Salinity on the Cultivation of *Scenedesmus obliquus* for Biodiesel Production, *Biotechnology and Bioprocess Engineering*, **17**, 591-597.
- Lee, Y.R., Chen, J.J. (2016), Optimization of Simultaneous Biomass Production and Nutrient Removal by Mixotrophic *Chlorella* sp. Using Response Surface Methodology, *Water Science and Technology*, **73** (7), 1520-1531.
- Li, T., Zheng, Y., Yu, L., Chen, S. (2014), Mixotrophic cultivation of a *Chlorella sorokiniana* strain for enhanced biomass and lipid production, *Biomass Bioenerg.* **66**, 204-213.
- Norris, L., Norris, R. E., Calvin, M. (1955), A survey of the rates and products of short-term photosynthesis in plants of nine Phyla, *J. Exp. Bot.*, **6** (1), 64-74.
- Pittman, J.K., Dean, A.P., Osundeko, O. (2011), The potential of sustainable algal biofuel production using wastewater resources, *Bioresource Technology*, **102** (1), 17-25.
- Ruiz J., Álvarez-Díaz P.D., Arbib Z., Garrido-Pérez C., Barragán J., Perales J.A. (2013), Performance of a flat panel reactor in the continuous culture of microalgae in urban wastewater: Prediction from a batch experiment, *Bioresource Technology*, **127**, 456-463.
- Sander K., Murthy G.S. (2010), Life cycle analysis of algae biodiesel, *Int. J. Life Cycle Assess*, **15** (7), 704-714.
- Scragg, A.H., Illman, A.M., Carden, A., Shales, S.W. (2002), Growth of microalgae with increased caloric values in a tubular bioreactor, *Biomass Bioenerg.* **23** (1), 67-73.
- Sydney, E.B., da Silva, T.E., Tokarski, A., Novak, A.C., de Carvalho, J.C., Woiciechowski, A.L., Larroche, C., Soccol, C.R. (2011), Screening of microalgae with potential for biodiesel production and nutrient removal from treated domestic sewage, *Applied Energy*, **88**, 3291-3294.
- Wilkie, A.C., Edmundson, S.J., Duncan, J.G. (2011), Indigenous algae for local bioresource production: Phycoprospecting, *Energy for Sustainable Development*, **15**, 365-371.